

# Solar Windsock Light Kit

AV-09-4WL


**Avlite**  
www.avlite.com  
AUTHORISED DISTRIBUTOR

## Features

- Integrated solar/battery system
- 140watt solar module (standard)
- 2 x 55Ah SLA batteries (standard)

## Typical Applications

- Solar Windsock Light Kit

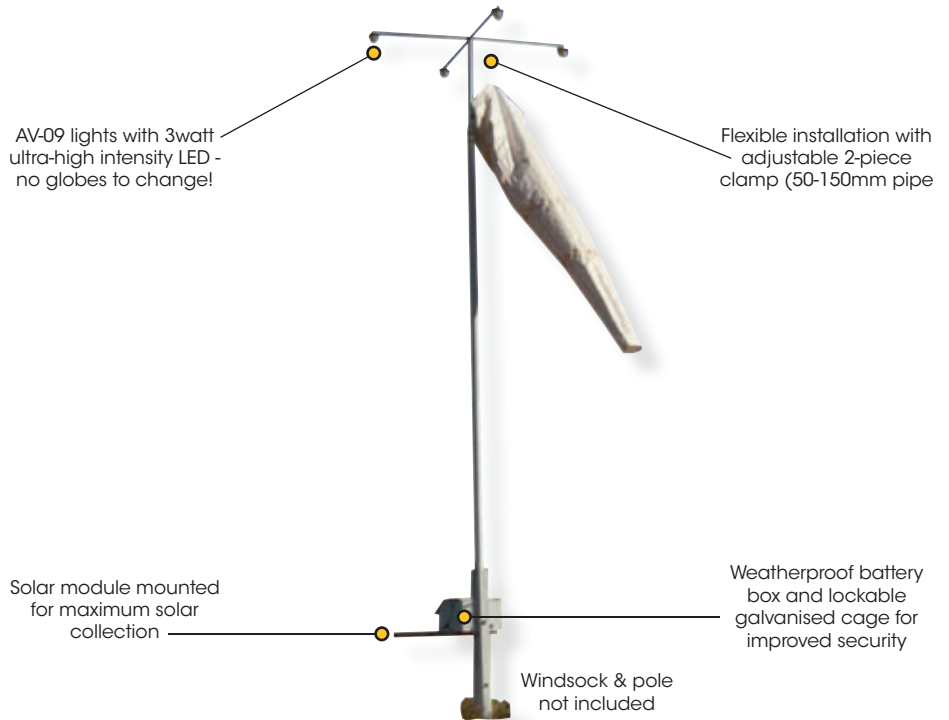

**Avlite Systems' AV-09-4WL Solar Windsock Light Kit provides users with a complete, reliable and low maintenance solution to windsock illumination.**

This complete windsock lighting kit incorporates four (4) AV-09 lights mounted onto 12mm powder-coated square tubing arms, a 140watt multicrystalline solar module and mounting bracket, and 110Ah SLA battery (2 X 55Ah) housed in a rotationally moulded weatherproof battery box with galvanized lockable cage for improved security.

Each AV-09 light incorporates a 3watt ultra-high intensity LED as a light source offering up to 100,000 hours of service - no need to change any globes! With low power consumption and external sun-switch for automatic night activation, the AV-09-4WL is a fantastic alternative to traditional hard-wired or fluorescent products.

The AV-09-4WL can be installed immediately and requires no costly underground wiring. The complete kit comes packaged in a 155x69x76cm pallet for ease of shipping. Other configurations are available on request.



Solar module/battery configuration of AV-09-4WL Windsock Light



**systemsinterface**  
total airport solutions

Unit 71.5 Dunsfold Park, Cranleigh, Surrey GU6 8TB, United Kingdom  
Tel: +44 (0)1483 267 066 Fax: +44 (0)1483 267 044 Email: sales@systemsinterface.com  
www.systemsinterface.com

# Solar Windsock Light Kit

AV-09-4WL

## SPECIFICATIONS\* \*

## AV-09-4WL

### Light Characteristics

Light Source	4 x domed luminaires each with 1x 3watt ultra-high intensity surface-mounted LED
Available colors	White
Horizontal & Vertical Divergence (degrees)	120
LED Life Expectancy (hours)	>100,000

### Electrical Characteristics

Current Draw (mA)	1000
Circuit Protection	Polarity protected
Operating Voltage (v)	12
Temperature Range	-40 to 80°C

### Solar Characteristics

Solar Module Type	Multicrystalline
Output (watts)	140
Solar Module Efficiency (%)	15
Charging Regulation	Controller

### Power Supply

Battery Type	SLA (Sealed Lead Acid)
Battery Capacity (Ah)	2 x 55Ah
Nominal Voltage (v)	12
Autonomy (nights)	8

### Certifications

CE	EN61000-6-3:1997. EN61000-6-1:1997
Quality Assurance	ISO9001:2008

### Intellectual Property

Trademarks AVLITE® is a registered trademark of Avlite Systems


### Warranty \*

3 year warranty

### Options Available

• External ON/OFF Switch

- Specifications subject to change or variation without notice
- \* Subject to standard terms and conditions

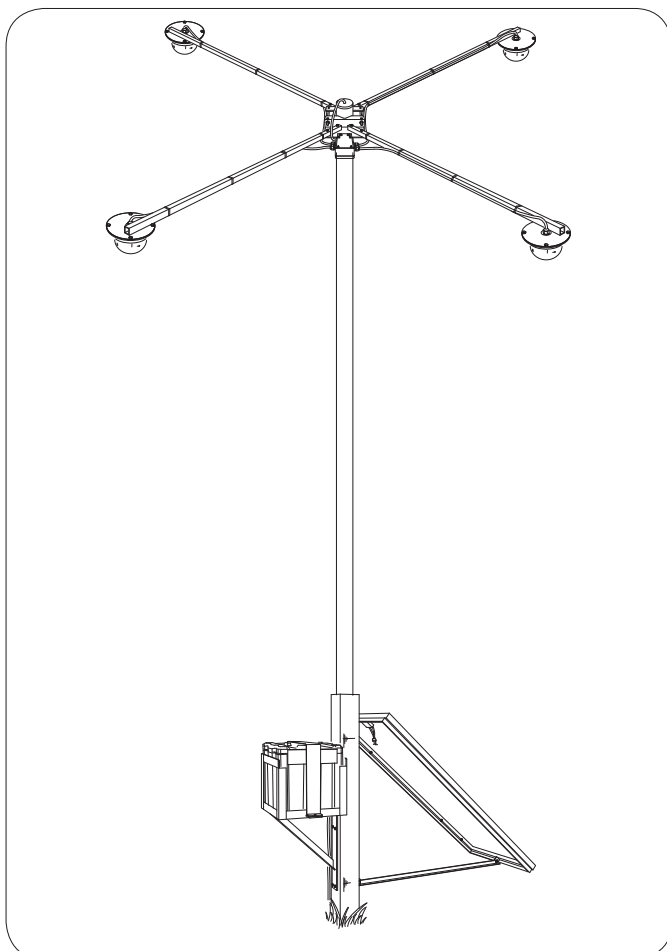

"In addition to the AV-70 airstrip lights we purchased, the Windsock Lighting Kit is great - just what we needed. It lights up the sock perfectly!"

*Kathy Dyer.*  
Heli-Muster (NT) Pty Ltd