

Radio Controlled

Solar Powered Airfield Lighting

Avlite
www.avlite.com
AUTHORISED DISTRIBUTOR

Features

- 2.4Ghz worldwide accepted radio control
- 128bit security encryption
- SHUT DOWN or turn all lights 'ON' remotely within seconds
- Allocate lights into 'light groups', and remotely control each group
- Change light colours remotely
- Set units to synchronized flashing

Compliance

- FCC Approved, M100103



The Avlite Systems radio controlled airport lighting platform is designed to offer airports, defence, and aid agencies complete flexibility and enormous advantages over traditional airport fixtures.

The system is operated by a wireless handheld controller, which enables personnel to remotely activate and set specific characteristics of lights within their airfield.

Lights can be allocated to up to 16 'groups', such as taxiways, runway edge or threshold, and each group can be controlled independently.

The operator can change the colour of each light in the group remotely by selecting between internal LED light banks - greatly expanding the flexibility of the system.

For defence applications, models can be supplied with the ability to remotely switch between visual and infrared light output.

In addition to switching between operating colours, lights can be set to any of over 256 flash patterns, including MORSE CODE. Lights set to the same flash rate will automatically synchronize with each other to provide clear perimeter or security marking.

Using advanced proprietary software, the airfield lighting system has a practically unlimited operational range. The operating range of the hand-held controller is up to 1.5km - after which one of the lights in range will relay the message to other lights in the network.

Avlite Systems is a world leader in the production of solar powered LED airfield lighting systems, deployed throughout some of the most demanding regions by customers including the US Army and US Air Force.

The 2.4Ghz wireless network platform is designed to allow the operator to control a wide range of Avlite products on the airfield, including taxiways, runways, barricades, obstruction, sign lighting, and area lighting - all with a single handheld controller.

Radio Controlled

Solar Powered Airfield Lighting



Handheld controller and charger in protective case

Wireless Handheld Controller

The handheld wireless controller enables personnel to remotely activate and set specific characteristics of lights within their airfield, via 128-bit encrypted RF data.

Lights may be designated into up to 16 independent groups, and then interrogated to specify individual light profiles such as light flash characteristic, intensity and colour (LED banks). In addition the lights may be manually activated via the controller, or set to automatically begin operation via the internal light sensor. The straight-forward menu makes the radio-controlled airfield lighting system very easy to operate.


The lightweight unit has an operational range of up to 1.5km, and features a heavy-duty aluminium housing, LCD screen, RF aerial and 4 push buttons for parameter control. An IP67 rated charging plug enables ease of battery recharge.

The wireless handheld controller is available with encryption (ALS-RC-2.4) and without encryption - 'civilian' open software (ALS-RC-2.4.C)

Optional PC Interface

In addition to all the features available via the wireless handheld controller, users may access their airfield lights via PC interface. All system features available from the handheld wireless controller are available from the interface, for ease of use and accessibility.

Avlite Systems PC Interface Command Centre allows the user the ability to control the entire airfield without leaving their desk. Lights can be controlled as easily as selecting one of the many settings and pressing the Send ICD Message button.

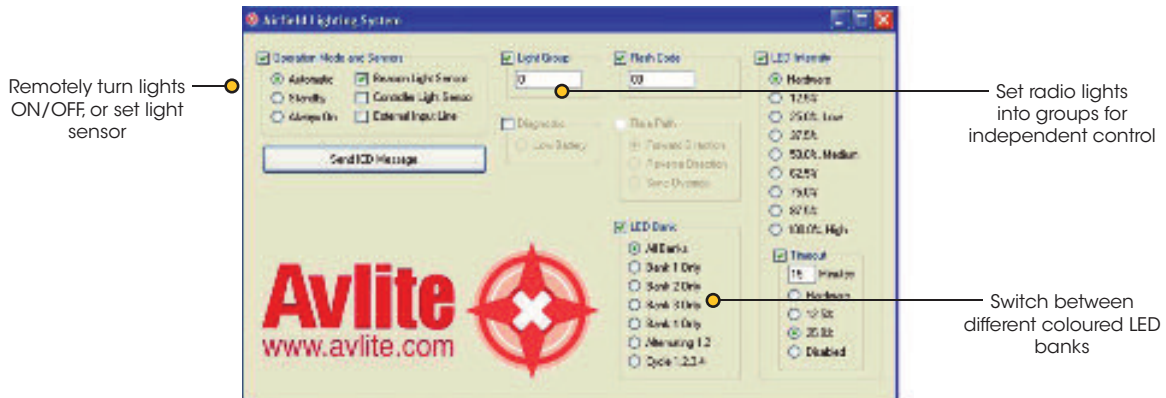

Remotely turn lights ON/OFF, or set light sensor

Set radio lights into groups for independent control

Switch between different coloured LED banks

The Avlite short-range radio controller can be supplied with a PC interface, allowing users to control light operations from a notebook or desktop computer

SPECIFICATIONS •

Electrical Characteristics

Range	1.5km, peer-to-peer networking
Temperature Range	-40 to 80°C
Frequency (GHz)	2.4
Nominal Voltage (V dc)	7.2

Power Supply

Battery Type	High grade NiMH - Environmentally friendly
Battery Capacity (Ah)	16
Battery Voltage (V dc)	7.2

Physical Characteristics

Case Material	Anodised aluminium
Screen	Backlit
Product Life Expectancy	Up to 12 years

Certifications

FCC Approved	M100103
CE	EN61000-6-3:1997. EN61000-6-1:1997
Quality Assurance	ISO9001:2008

Intellectual Property

Trademarks	AVLITE® is a registered trademark of Avlite Systems
------------	---

Warranty *

1 year

Available Models

AV70-RF
AV72-RF
AV425-RF
EAGLE
AV125 Series

* Specifications subject to change or variation without notice
* Subject to standard terms and conditions

